


SHEET METAL MACHINERY

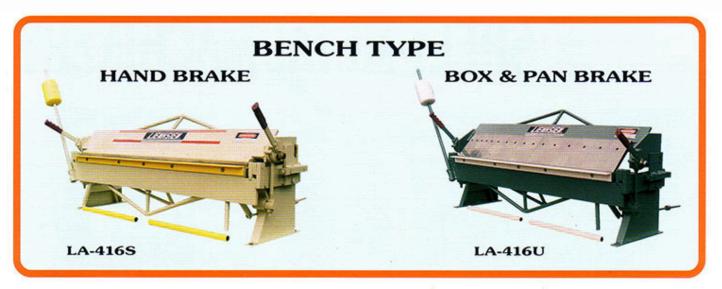

STANDARD EQUIPMENT:


- * One of counterweight.
- * Standard hand brake including one pair of bending rail.
- * Box & pan brake including finger assortments:

(50.8mm x 5) + (76.2mm x 6) + (101.6mm x 5) =16 pcs (1225mm) (2"x 5) + (3"x 6) + (4"x 5) =16 pcs (48")

SPECIAL FEATURES:

These brakes are a value in construction, performance and cost. These carefully engineered units have the all-steel welded constructions, plastic hand grips, and bronze bushings which reduce wear. They are highly popular in school, industry, and sheet metal shopes because of the ease of operation, precise performance, and high quality features, all at a low cost.

SPECIFICATIONS MODEL	Capacity mm (in)	Max. lift of beam mm (in)	Beam adjustment mm (in)	Shipping weight kg (lbs)	Size of case mm (in)
LA-416S	1.5 x 1230 (16GA x 48½")	32 (11/4")	16 (5/8")	214 (470)	1600 x 559 x 686 (61" x 22" x 27")
LA-416U	1.5 x 1220 (16GA x 48")	32 (11/4")	16 (5/8")	240 (528)	1600 x 559 x 720 (63" x 22" x 29")

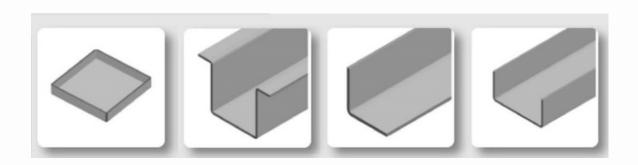

LIEN HSIEN MACHINERY CORPORATION

63, LIN SEN EAST ROAD, CHIA-YI TAIWAN

TEL: +886-5-2721188 FAX: +886-5-2721177